




## INFORMATION GUIDE

# 3-POINT QUICK HITCH

### QHX1

Maximize your efficiency in the field with the Summit Tractors 3-Point Quick Hitch—your essential tool for fast, secure implement changes.

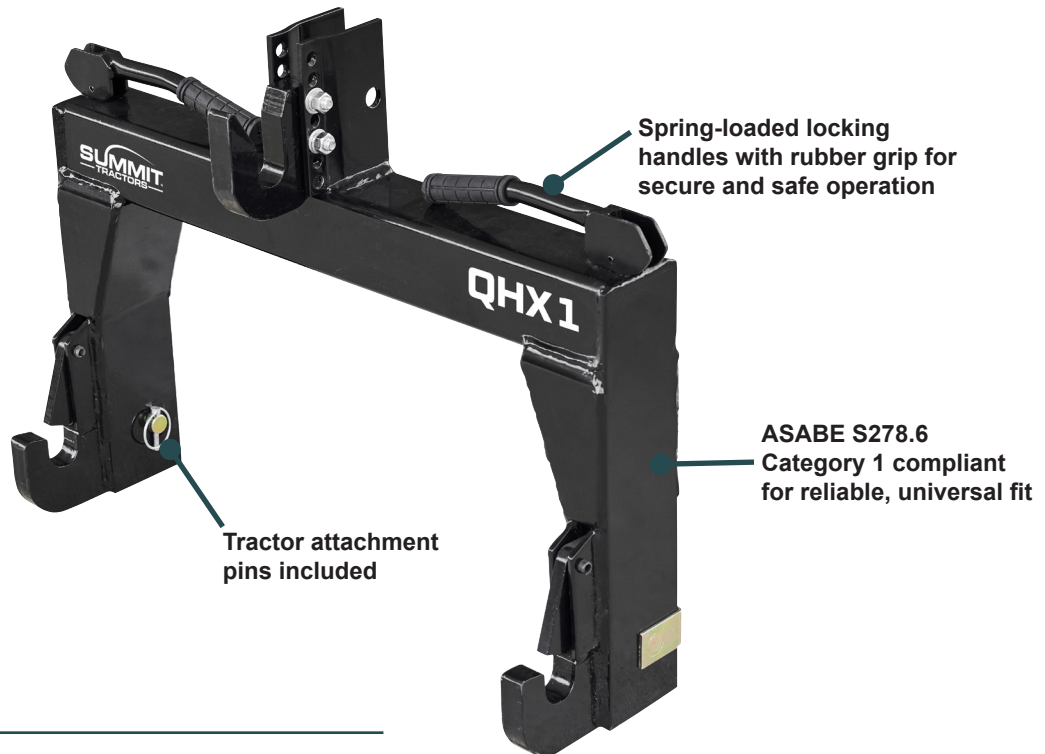

### SPECIFICATIONS

MODEL	QHX1
Width, Overall	31.88"
Height, Overall	23.62"
Length, Overall	8.38"
Weight	74 lb
Lower hook inside clearance width	27.03"
Lower hook outside clearance width	29.25"
Lower hook pin/bushing diameter allowance	1.50"
4 position adjustable top hook	14.88" - 18.13" hook height
Top link hook pin/bushing diameter allowance	1.3"
Lift capacity	3,000 lb*

**NOTE:** Utilizing the quick hitch requires operators to install bushings (sold separately) on the upper and lower implement hitch pins. Adding bushings ensures the implement sits securely on the quick hitch and functions correctly when in use.

**\*Quick hitch lift capacity only. Do not exceed tractor lift capacity.**

## SAFETY INFORMATION

- Read and follow all safety guidelines. Failure to follow safety rules can result in serious injury or death.
- Never allow children or untrained persons to operate the equipment.
- DO NOT exceed the lift capacity of tractor or quick hitch. Exceeding the lift capacity may cause serious injury or damage to the equipment.
- Ensure quick hitch is securely attached to tractor before connecting to an implement.
- Never stand between the quick hitch and the implement while connecting or disconnecting. Unexpected movement or shifting equipment can cause serious injury or death. Always ensure the tractor is turned off, brakes are engaged, and all personnel are clear of the connection area before proceeding.
- Never allow riders on tractor, quick hitch, or attached implement.
- Tractor must be equipped with a Roll-Over Protective Structure (ROPS) or ROPS cab and seat belt. Keep seat belt securely fastened. Falling off tractor can result in death from being run over or crushed. Keep foldable ROPS system in “locked up” position at all times.
- A minimum of 20% of tractor and equipment weight must be on the tractor’s front wheels when implements are in transport position. Without this weight, tractor could tip over, causing personal injury or death. The weight may be attained with a loader, front wheel weights, ballast in tires or front tractor weights. Weigh the tractor and equipment. Estimations may result in unsafe operating conditions.
- DO NOT operate or transport equipment while under the influence of alcohol or drugs.
- Operate only in daylight or sufficient artificial light for safe operation.
- Keep children and bystanders away from storage area.

### Manufacturer’s Limited Warranty

Summit Tractors LLC, 3379 Peachtree Road NE Suite 555 Atlanta, Ga 30326, warrants to the original purchaser that the purchased product is free from defects in material and workmanship for a period of one (1) year commencing on the date of original purchase, as evidenced by the original receipt, and will, at its option, repair, replace, or issue credit for any product or part found to be defective.

This limited warranty shall only apply if this product has been operated and maintained in accordance with the Operator’s Manual furnished with the product, and has not been subject to misuse, abuse, commercial or industrial use, neglect, improper maintenance, alteration or accident, or which has been used for a purpose for which the product was not designed. Damage resulting from the installation or use of any part, accessory, or attachment not approved by Summit Tractors LLC, for use with the product covered by the Operator’s Manual, shall void the warranty as to any resulting damage.

This limited warranty is extended solely to the original purchaser of the product. Should the original purchaser sell or otherwise transfer this product to a third party, this warranty does not transfer to the third party in any manner.

### Warranty Disclaimer

This limited warranty is in lieu of, and Summit Tractors LLC disclaims and excludes any express and implied warranties with respect to the product including, without limitation, merchantability and fitness for a particular purpose. No other express warranty, whether written or oral, given by any person or entity, including a retailer, with respect to any product, shall bind Summit Tractors LLC.

Summit Tractors LLC’s exclusive liability for breach of the limited warranty, as set forth above, on the product shall be to repair or replace the product within the warranty period in accordance with the terms of this limited warranty. The choice of remedy shall belong solely to Summit Tractors LLC. In no event shall Summit Tractors LLC be liable for any loss or damages of any other kind, whether direct, incidental, consequential including lost profits, exemplary, special or otherwise, including without limitation, expenses incurred for substitute or replacement product or for rental expenses to temporarily replace a warranted product.

Under no circumstance shall recovery, of any kind, be greater than the amount of the purchase price of the product purchased. Customer assumes all risk and liability for loss, damage, or injury to customer or customer’s property and/or the property of others arising out of the misuse or inability to use the product.

### Legal Rights

This limited warranty gives you specific legal rights, and you may also have other rights which may vary from state to state. Some states do not allow any limitation on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so the above limitations may not apply to you.